INSTALLATION CONNECTIONS		
	Description	Note
D	DRAIN CONNECTION	1-1/2 F-NPT
W	HOT WATER INLET (110º F MIN.)	1/2 F-NPT
E1	MAIN ELECTRICAL (SINGLE & 2-POINT)	1-3/8 HOLE
E2	BOOSTER ELECTRICAL (2 PT ONLY)	1-3/8 HOLE
C	CHEMICAL LINE & SIGNAL ACCESS	1/2 HOLES (4)

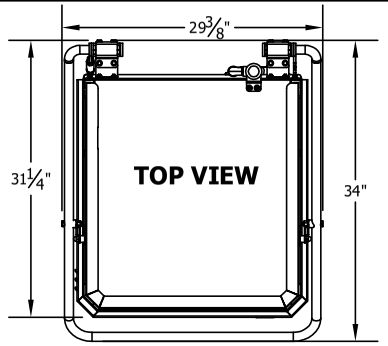

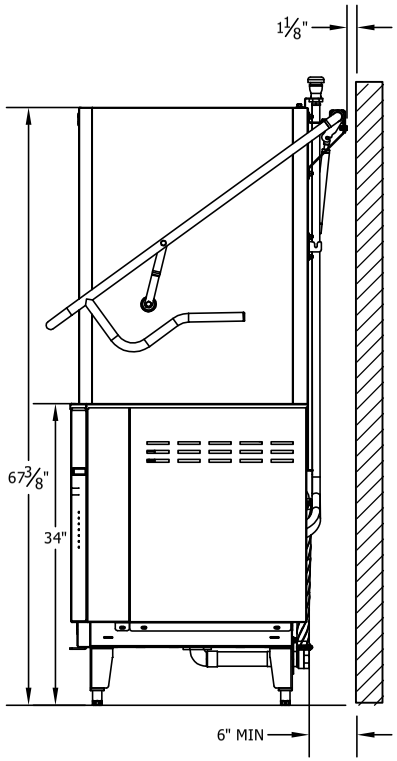

SIDE VIEW (CLOSED)

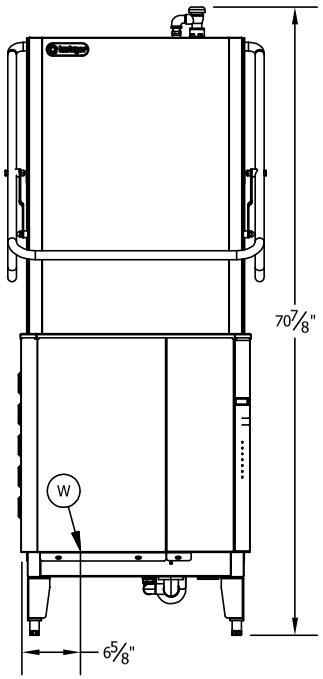

FRONT VIEW

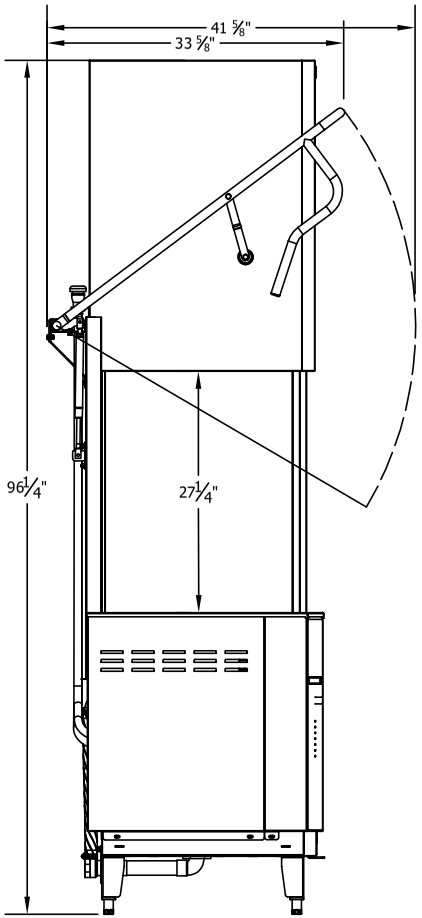

SIDE VIEW (OPEN)

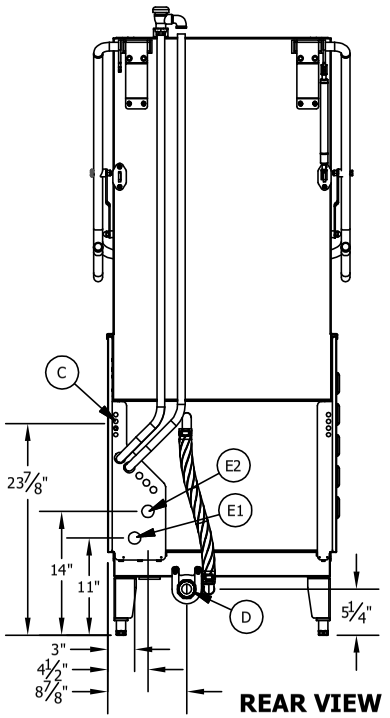

REAR VIEW

FEET ARE ADJUSTABLE ±0.5 IN
REFER TO SPEC SHEET FOR ALL UTILITY REQUIREMENTS
PLEASE CONTACT FACTORY FOR TECHNICAL QUESTIONS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES
.XX ±.02 .XXX ±.005 FRACTIONS ±1/32 ANGLES ±1/2

THE INFORMATION ON THIS DRAWING IS THE PROPRIETARY PROPERTY OF INSINGER MACHINE COMPANY AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY WHATSOEVER FOR ANY PURPOSE INCLUDING, BUT NOT LIMITED TO, THE COPYING OF THIS INFORMATION FOR USE IN THE MANUFACTURING OF SIMILAR OR IDENTICAL PART, COMPONENT, OR SYSTEM. ANY VIOLATION OF THE PROPRIETARY RIGHTS OF INSINGER MACHINE COMPANY SHALL SUBJECT THE PARTY RESPONSIBLE TO APPROPRIATE LEGAL ACTION.

insinger
INSINGER MACHINE CO.
6245 STATE ROAD
PHILADELPHIA, PA. 19135
Phone: (215) 624-4800

DRAWN BY: AH
DATE: 01/29/25
SCALE: 1:1

MODEL: CX20 HH
DESCRIPTION: High Temperature Door Type Electrically Heated Dishwashing Machine
REV: A
DWG NUMBER: 1000-10111
REVISION DATE: 01/29/25
SHEET 1 OF 1