



- NOTES:
1. VENTS & ADJUSTABLE DAMPERS FURNISHED ONLY WHEN SPECIFIED.
 2. ALLOW 24" MIN. CLEARANCE BELOW DISH TABLE TO SERVICE ELECTRICAL EQUIPMENT

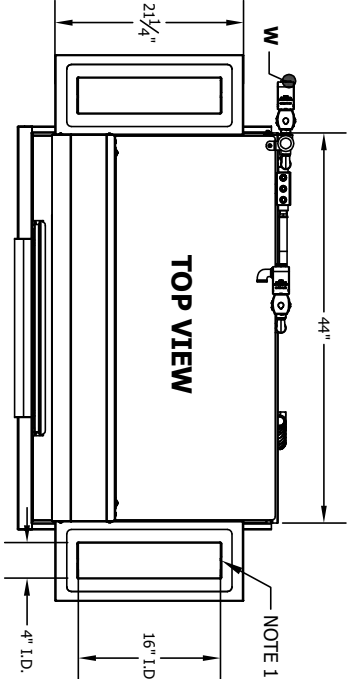

INSTALLATION CONNECTIONS		
Description	Note	
D DRAIN CONNECTION	1-1/2 F-NPT	
W HOT WATER INLET (110° F MIN.)	1/2 F-NPT	
E1 MAIN ELECTRICAL (SINGLE & 2-POINT)	1-3/8 HOLE	
E2 BOOSTER ELECTRICAL (2 PT ONLY)	1-3/8 HOLE	
C CHEMICAL LINE & SIGNAL ACCESS	1/2 HOLES (4)	

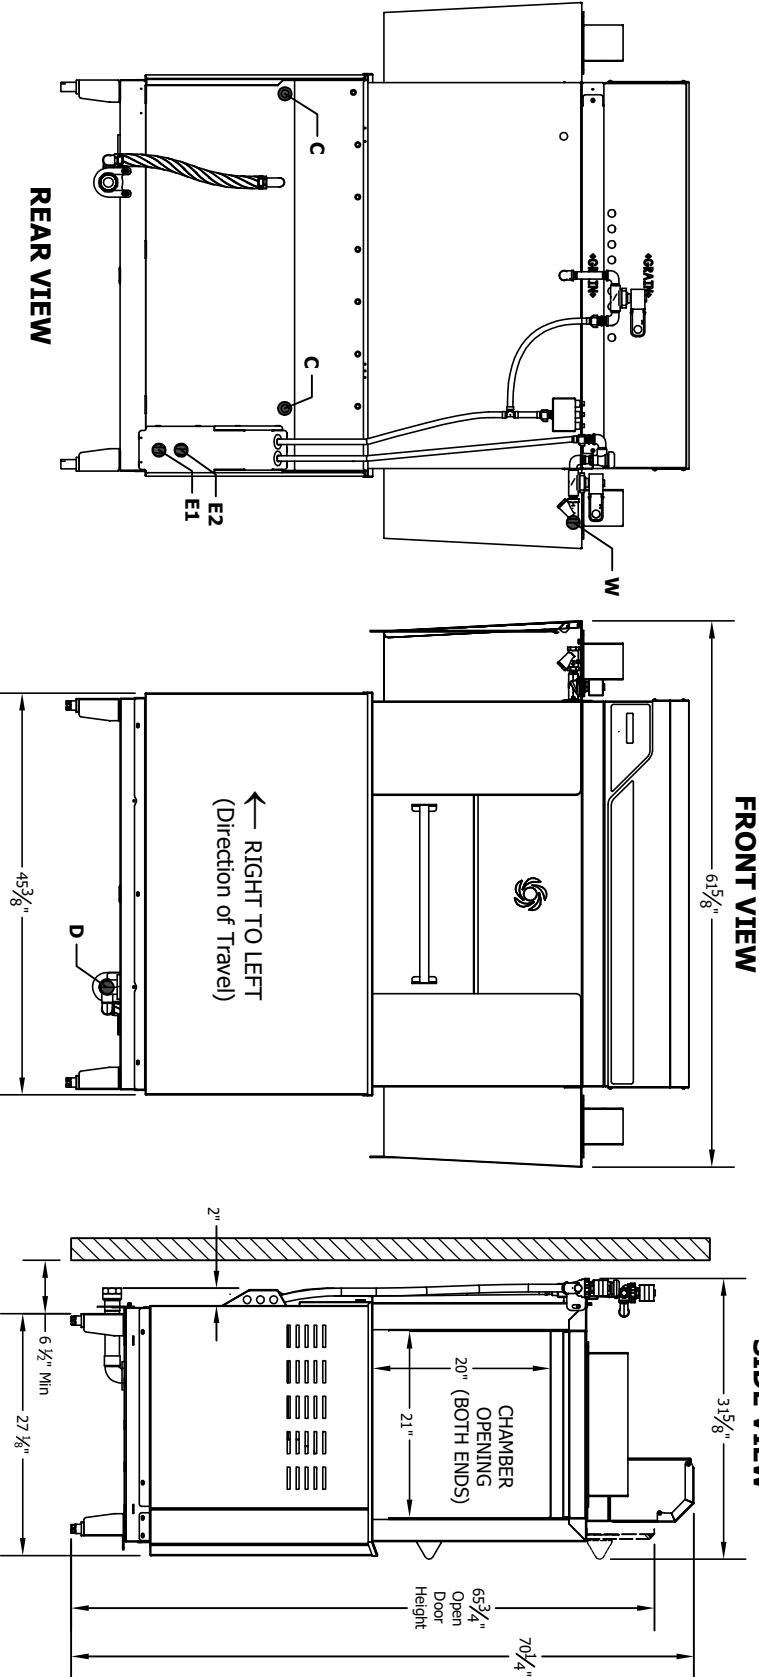

FEET ARE ADJUSTABLE ± 1 IN
REFER TO SPEC SHEET FOR ALL UTILITY REQUIREMENTS
PLEASE CONTACT FACTORY FOR TECHNICAL QUESTIONS

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		TOLERANCES		ANGLES	
XX	XXX	FRACTIONS	± 0.05	± 1/32	± 1/2
THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF INSINGER MACHINE COMPANY AND MAY NOT BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF INSINGER MACHINE COMPANY. ANY VIOLATION OF THE PROPRIETARY RIGHTS OF INSINGER MACHINE COMPANY WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW. INSINGER MACHINE COMPANY IS NOT RESPONSIBLE FOR APPROPRIATE LEGAL ACTION.					
INSINGER MACHINE CO. 6425 STATE ROAD PHILADELPHIA, PA 19135	DRAWN BY: J. J. J.	DATE: 02/03/25	SCALE: 1:1	REV: A	SHEET 1 OF 1
DESCRIPTION: High Temperature Batch Conveyor		REVISION DATE: 02/03/25		REV: A	
Dwg Number: 1000-10095		Rev: A		Sheet 1 of 1	
Phone: (215) 624-4800		Fax: (215) 624-4801		Email: sales@insinger.com	