



INSTALLATION CONNECTIONS

| Description | Note |
|---------------------------------------|---------------|
| D DRAIN CONNECTION | 1-1/2 F-NPT |
| W HOT WATER INLET (110° F MIN.) | 1/2 F-NPT |
| E1 MAIN ELECTRICAL (SINGLE & 2-POINT) | 1-3/8 HOLE |
| E2 BOOSTER ELECTRICAL (2 PT ONLY) | 1-3/8 HOLE |
| C CHEMICAL LINE & SIGNAL ACCESS | 1/2 HOLES (4) |

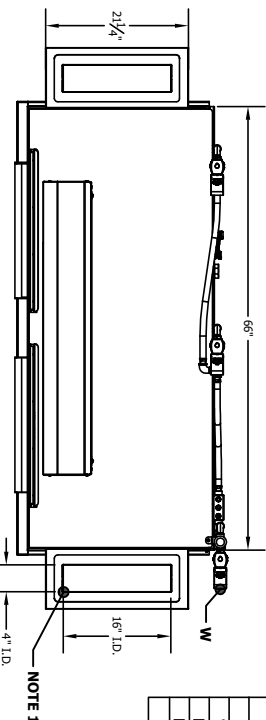

- NOTES:
- VENTS & ADJUSTABLE DAMPERS FURNISHED ONLY WHEN SPECIFIED.
 - ALLOW 24" MIN. CLEARANCE BELOW DISH TABLE TO SERVICE ELECTRICAL EQUIPMENT

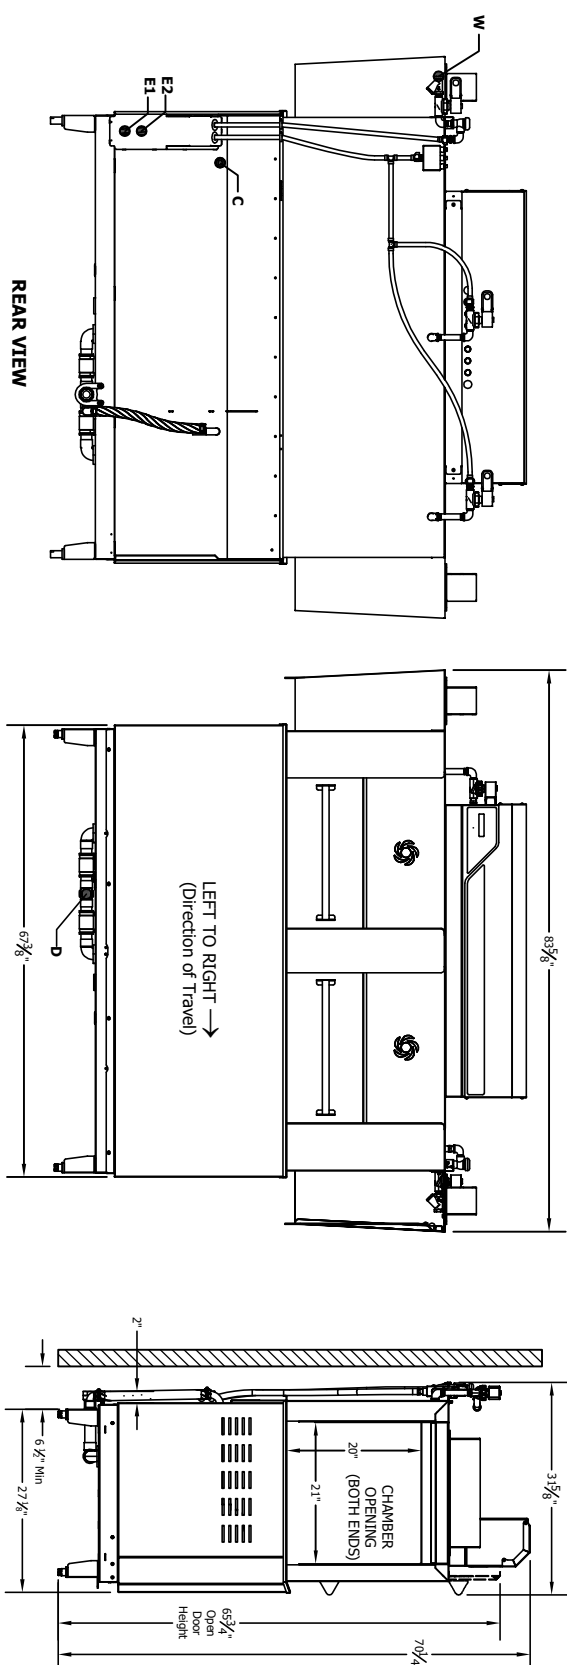

FEET ARE ADJUSTABLE ±1 IN
REFER TO SPEC SHEET FOR ALL UTILITY REQUIREMENTS
PLEASE CONTACT FACTORY FOR TECHNICAL QUESTIONS

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

| XX | XXX | FRACTIONS | ANGLES |
|------|-------|-----------|--------|
| ±.02 | ±.005 | ±1/32 | ±1/2 |

INSINGER MACHINE CO.
6426 STATE ROAD
PHILADELPHIA, PA 19135

insinger

MODEL: ADMIRAL 66 ADVANCED L-R

DESCRIPTION: High Temperature Rack Conveyor

REVISION DATE: 02/04/25

1 OF 1

DRAWN BY: JONE

DATE: 02/04/25

SCALE: 1:1

REV: A

THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF INSINGER MACHINE COMPANY AND MAY NOT BE DISCLOSED TO ANY OTHER PARTY WITHOUT THE WRITTEN PERMISSION OF INSINGER MACHINE COMPANY. THIS INFORMATION IS NOT LIMITED TO THE COMPANY OF THIS SIMILAR OR IDENTICAL PART COMPONENT OR SYSTEM. ANY VIOLATION OF THE PROPRIETARY RIGHTS OF INSINGER MACHINE COMPANY WILL BE THE RESPONSIBILITY OF THE PARTY RESPONSIBLE TO APPROPRIATE LEGAL ACTION.

Phone: (215) 624-4800