



INSTALLATION CONNECTIONS

Description	Note
D DRAIN CONNECTION	1-1/2 F-NPT
W HOT WATER INLET (110° F MIN.)	1/2 F-NPT
E1 MAIN ELECTRICAL (SINGLE & 2-POINT)	1-3/8 HOLE
E2 BOOSTER ELECTRICAL (2 PT ONLY)	1-3/8 HOLE
C CHEMICAL LINE & SIGNAL ACCESS	1/2 HOLES (4)

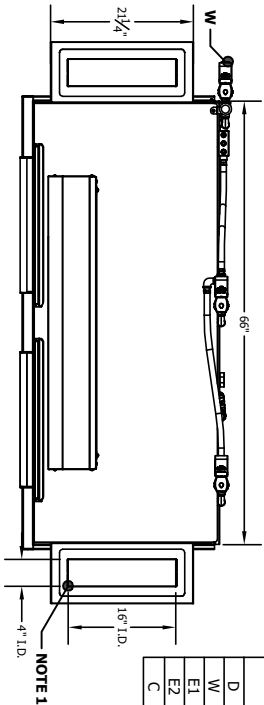


- NOTES:
1. VENTS & ADJUSTABLE DAMPERS FURNISHED ONLY WHEN SPECIFIED.
 2. ALLOW 24" MIN. CLEARANCE BELOW DISH TABLE TO SERVICE ELECTRICAL EQUIPMENT


TOP VIEW

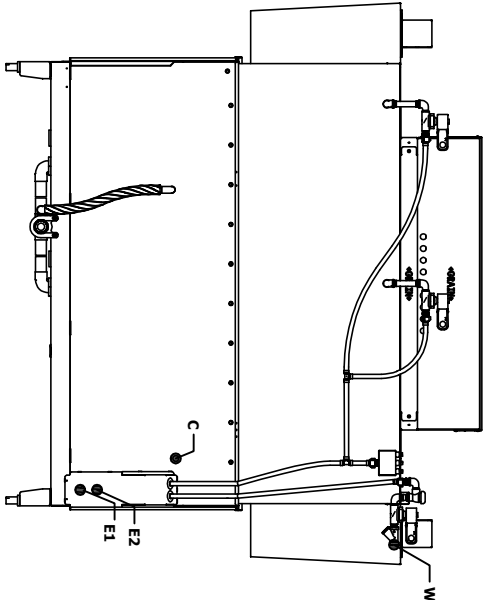

REAR VIEW

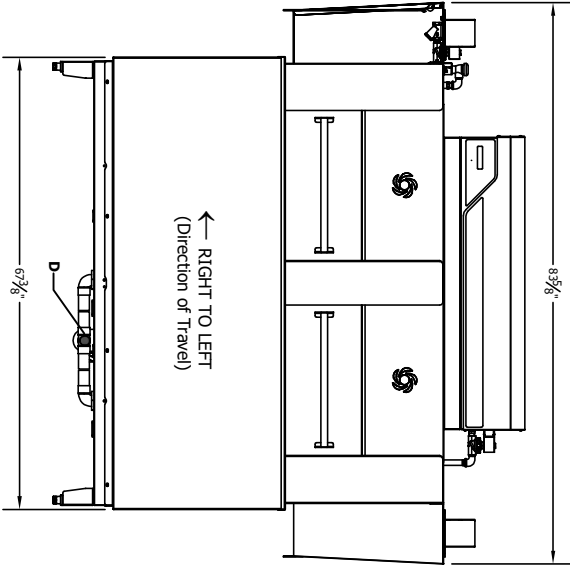

FRONT VIEW

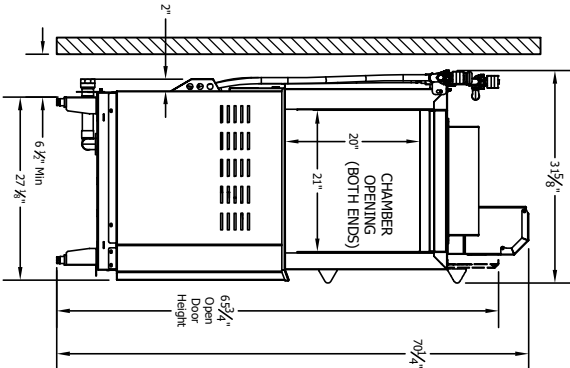

SIDE VIEW

FEET ARE ADJUSTABLE ±1 IN
REFER TO SPEC SHEET FOR ALL UTILITY REQUIREMENTS
PLEASE CONTACT FACTORY FOR TECHNICAL QUESTIONS

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

XX .XXX FRACTIONS ANGLES
±.02 ±.005 ±1/32 ±1/2

INSINGER MACHINE CO.
PHILADELPHIA, PA. 19135

INSINGER

MODEL: ADMIRAL 66 ADVANCED R-L

DESCRIPTION: High Temperature Door Type

Electrically Heated
Dehumidifying Machine
Right Hand Feed

DWG NUMBER: 1000-10103

REVISION DATE: 02/04/25

SCALE: 1:1

DRAWN BY: DATE: 02/04/25

PHONE: (215) 624-4800

REV: A

SHEET

1 OF 1